
# **Street Sign Specifications for the City of Salem**

## 6/17/2016

_		Α	В	С	D	E	F	G	Н
	GROUND MOUNTED SIGN 25 MPH OR LESS	6"	4"	2"	3"	1"	1.25"	N/A	N/A
	GROUND MOUNTED SIGN 30 MPH OR GREATER (STANDARD)	8"	6"	3"	5"	1"	2.25"	N/A	N/A
	GROUND MOUNTED SIGN 30 MPH OR GREATER (WITH DROP DOWN LETTERS)	9" <sup>1</sup>	6"	3"	5"	1"	2.25"	N/A	N/A
	MAST ARM MOUNTED SIGN (STANDARD)	13"	8"	3 <mark>.5</mark> "	6"	<del>1.75</del> 2"	2. <mark>2</mark> 5"	1"	1.5"
	MAST ARM MOUNTED SIGN (WITH DROP DOWN LETTERS)	14" <sup>1</sup>	8"	3 <mark>.5</mark> "	6"	<del>1.75</del> 2"	2. <mark>2</mark> 5"	1"	1.5"

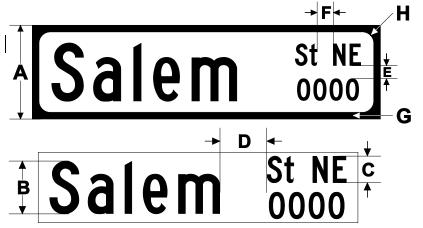

A = Substrate size

**B** = Font height

**C** = Supplemental lettering

**D** = Minimum spacing between supplemental lettering & street name

**E** = Spacing between suffix & block number

**F** = Suffix & section spacing

G = Border width

**H** = Border radius

### Colors:

Legend – White (Retroreflective).

Background - Green (Retroreflective).

Substrates shall be sheeted with White Hi-Intensity Prismatic Sheeting.

Green 3-M Electronic Cuttable Film shall be reverse weeded.

#### Letter Series & Size:

Series "C" font shall be used in accordance to the Federal Highway Administration Standards.

Street names shall have initial uppercase followed by lower case letters.

# **Supplemental Lettering:**

Whole block numbers only.

Suffix abbreviations shall be upper and lower case as follows: St, Rd, Dr, Av, Way, Ct, Ln, Lp, Pl, Blvd, Terr & Cir-

Section abbreviations shall be upper case as follows:

N, NE, NW, S & SE

Private streets will use Pvt in place of block numbers.

#### Substrate:

All substrates shall be aluminum with square corners. 6", 8", & 9" substrates shall have a thickness of .100"<sup>2</sup>. 13" & 14"substrates shall have a thickness of .125".

The lengths of substrates shall be as follows:

For 6" substrates: 24", 27", 30", 33", 36 or 42"<sup>2, 3</sup>.

For 8" & 9" substrates: 24", 27", 30", 33", 36", 42", 48", 54" or 60"<sup>2, 3</sup>.

For 13" & 14" substrates: 36", 42", 48", 54", 60", 66" or 72"<sup>3</sup>.

<sup>&</sup>lt;sup>1</sup> Use for text which includes lower case g, j, p, q, and y.

<sup>&</sup>lt;sup>2</sup> For 6" substrates 42" in length, and 8", & 9" substrates 60" in length the thickness shall be .125".

<sup>&</sup>lt;sup>3</sup> The "B" series font may be used for the street name as an alternate if the text is unable to fit on a 42" substrate for a 6" sign, a 60" substrate for an 8" and 9" sign, or a 72" substrate for a 13" or 14" sign.